

Specifications and technical data are subject to change without notice. Please contact us to confirm relevant information on ordering.


Shanghai Ebasee Electric Co., Ltd

Add:No.18, Gutang Rd,Shanghai 201209, China

Tel: +86 21 5032 0898 Fax: +86 21 5032 0828 http://www.ebasee.com





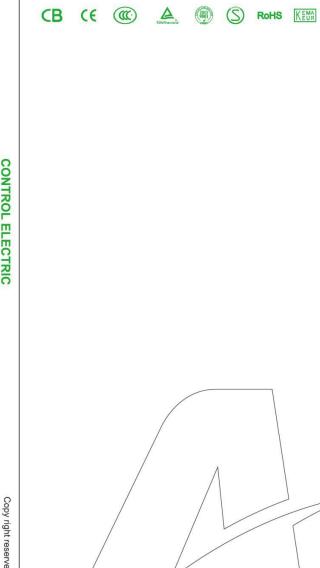





Company Profile

As a leading supplier in the low voltage electrics industry, Shanghai Ebasee Electric Co., Ltd. products have been used for residential, commercial and industrial applications with its quality and service. EBASEE brand is recognized for its quality and reliability in an ever-increasing number of markets worldwide. So far EBASEE products have gained many international approvals, such as TUV, KEMA, CB, SEMKO, RoHS, CE, and CCC etc.

With quality raw materials and components supply, all products are manufactured to EBASEE's defined specifications. We have 4 semi-auto production lines, up to date quality control facilities, and well-trained skillful workers. Moreover, with a technical R & D team and fully equipped in-house laboratory, EBASEE factory can carry out efficient new products developing and daily production QC as well.

EBASEE have wide range cooperations with world leading companies in new products developing or OEM, ODM cooperation. Meanwhile we also process industry cooperation on intelligent home products, and work with some university such as Xi'an Jiao Tong University on project solutions. EBASEE is focused on achieving growth through the growth and success of its worldwide partners.

EBASEE, guided by the "market-oriented" philosophy, powered with the "Quick response and flexible supply" capability, can support our worldwide partners to compete against established global players to deliver the most comprehensive and cost-effective products and service in the market.

"Smart life, Green EBASEE"



Enterprise credit

















CA10S

Universal Changeover Switch

Introduction



CA10S built-in lock type switches are mainly used to cut off power by built-in lock, make the switch in the "OFF" ("0") position to prevent unauthorized







Standard

The products comply with GB14048.3 and IEC60947-3

Parameter

Туре			LW28S-25	LW28S-32	LW28S-63
Rated insulation voltage(Ui)	V	690	690	690	690
Rated operational voltage(Ue)	V	440	440	440	440
Conventional thermal current(Ith)	Α	20	25	32	63
Rated operational current(le)	AC-21A	20	25	32	63
	AC-22A	20	25	32	63
Rated power P AC-23A	AC-23A	15	22	30	36
	KW	7.5	11	15	18.5

Туре		Dimension(mm)						Mounting dimension(mm)				
	Α	В	С	D	L	- 1	S	а	b	С	d1	d2
CA10S-20	48	84	24	43	51.5	32.5	1~4	36	36	40	Ф8.5	20
CA10S-25	48	84	24	45.2	58	32.5	1~4	36	36	40	Ф8.5	20
CA10S-32	64	112	32	58	85	34	1~6	48	48	48	Ф10	34
CA10S-63	64	112	32	66	90	34	1~6	48	48	48	Ф10	34

